


COMPACT

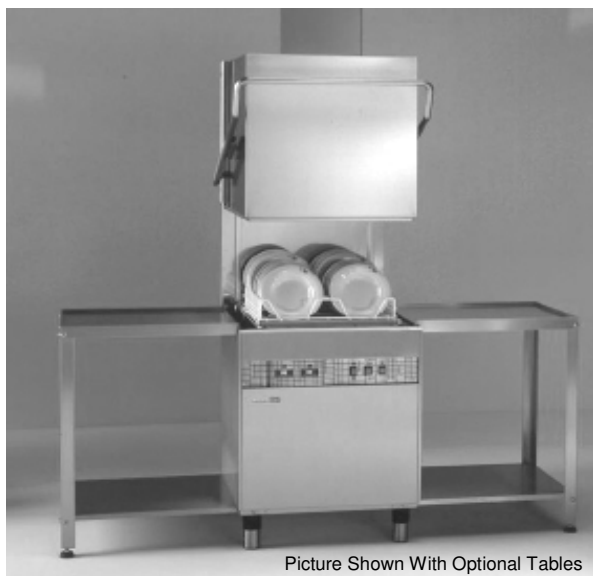

Picture Shown With Optional Tables

FEATURES

- 22 Plate Rack Capacity
- Automatic Rinseaid Injection
- Automatic Detergent Injection
- Stainless Steel Construction
- Primary & Secondary Wash Tank Filter
- Integral Rinse Booster Pump on Breaktank Model
- Safety Cut - Out Door Switch
- 2 x Plate Racks, 1 x Cup Basket,
- 1 x Saucer Insert & 4 x Cutlery Inserts Supplied

OTHER

- Water Pressure Requirement - min 2 bar / max 5 bar
- Usage at 3 bar approx 3.5ltr per cycle
- Operating Temperature - Wash 60°C / Rinse 85°C

Model

Model	Basket Size mm	Dimensions mm H x W x D	Cycle Time min	Door Opening Height mm
Compact 1	500 x 500	1450 (1895 max) x 650 (710 max) x 775	1 or 2	400
Compact 1 BT	500 x 500	1450 (1895 max) x 650 (710 max) x 775	1 or 2	400
Compact 3	500 x 500	1450 (1895 max) x 650 (710 max) x 775	1 or 2	400
Compact 3 BT	500 x 500	1450 (1895 max) x 650 (710 max) x 775	1 or 2	400

Electrical

Wash Pump load	Tank Heater load	Boiler Heater load	Total Electrical load	Voltage
0.9Hp	3000W	6000W	6900W / 30 Amps	230V
0.9Hp	3000W	6000W	6900W / 16 Amps	400V

Accessories

Item	Description	Code	RRP £
Water Softener	Use in medium/hard water areas to help prevent the build up limescale	LT8	80.00
		LT12	85.00
Baskets	Plate Rack 22 position	3210	41.54
	Cup Basket	3211	48.16
	Saucer Insert	4166	10.12
	Cutlery Insert	4167	5.52
Rinse Booster Pump (External)	For low pressure or hot water supply (max 50°C)	4809	209.48
Drip Trays	For Racking System	DT50	26.00
Table	870 H x 610 W x 515 D	TABLE	250.00
	870 H x 750 W x 515 D	TABLE2	300.00

ALL PRICES EXCLUDE DELIVERY & VAT